


◎ 适用于直径 16 毫米以下线缆 Suitable for 16mm or less of cable.

主要技术参数 Basic technical data

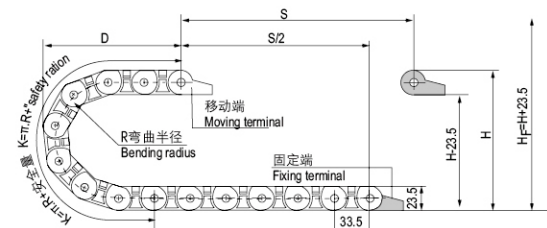

节距 = 33.5mm, 每米节数 = 30, 链长 = S/2 + K, S = 行程距离, K = π · R + "安全量"
 Pitch = 33.5mm, link per meter = 30, length of chain = S/2 + K, S = stroke, K = π · R + "safety ration"

R	28	38	48	60	75
H	80	100	120	144	174
D	74	84	94	106	121
K	168	201	235	268	335

安装实际高度 : H_f = H + 23.5mm (负载 0.5kg/m)

Actual mounting height: H_f = H + 23.5mm (load 0.5kg/m)

示意图 Drawing


- 主体 Main body
- 挡片 Ledge
- 接头 Bracket
- J15.120-SZB 梳状板 Pectinate plate
- J15.150-SZB 梳状板 Pectinate plate
- J18.125-SZB 梳状板 Pectinate plate
- J15.140-SZB 梳状板 Pectinate plate

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters						接头代号 Bracket No.	
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm) hole distance					
J18BF.1.18N	18	18	23.5	29	BF.N	28,38,48	X ₂	5.2*7L 5.2	B1=12 B2=10	33	15	29	J18BF.1.18N-XJT	
J18BF.1.25N	18	25	23.5	36	BF.N	28,38, 48,60,75	X ₄	5*10L	10	B1=16 B2=14	38	8	36	J18BF.1.25N-XJT
J18BF.1.37N	18	37	23.5	49	BF.N	28,38,48,75	X ₄	5.2*7L	11	25	33	7	49	J18BF.1.37N-XJT
J18BF.1.50N	18	50	23.5	61	BF.N	28,38,48,75	X ₄	5.2*8L	7.6	35	33	5	61	J18BF.1.50N-XJT

单位 (unit): mm

注: N 表示内侧打开 Note: N indicates that the interior opening

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)

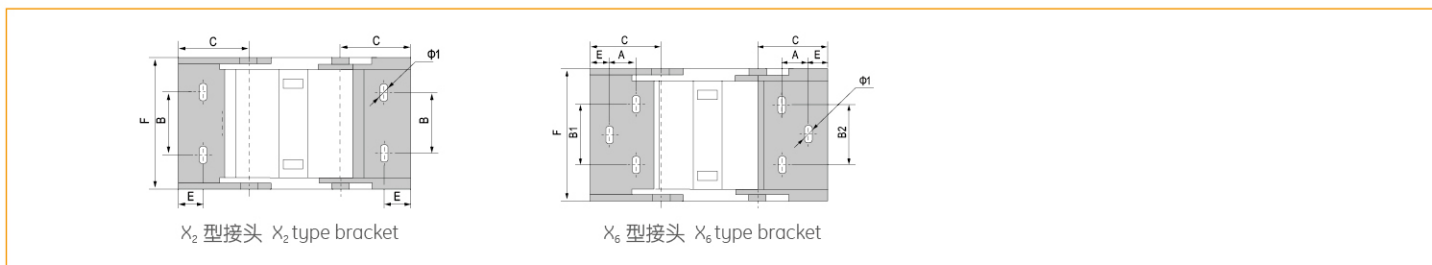

订货示例 Order Example

示例 拖链内高 18mm、内宽 18mm、半径 38mm、长度 1 米 / 30 节 (Sample: inner height 18mm, inner width 18mm, radius 38mm, length 1 meter / 30 links)

拖链 chain J18BF.1.18N R38 1000mm / 30 Links

接头 Bracket J18BF.1.18N-XJT 1 副 (Set)

配件 Accessories

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.