


◎ 适用于直径 41 毫米以下线缆 Suitable for 41mm or less of cable.

主要技术参数 Basic technical data

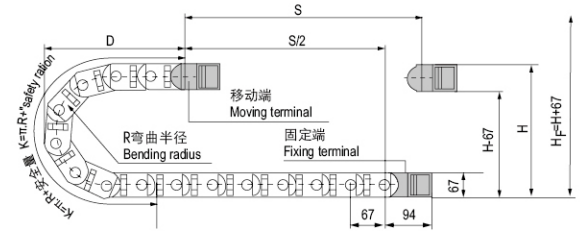


节距 = 67mm, 每米节数 = 15, 链长 = S/2 + K, S = 行程距离, K = π · R + "安全量"
Pitch = 67mm, link per meter = 15, length of chain = S/2 + K, S = stroke. K = π · R + "safety ration"

R	125	150	175	200	225	250	300
H	317	367	417	467	517	567	667
D	226	251	276	301	326	351	401
K	536	670	737	804	871	938	1139

安装实际高度 : H_f = H + 67mm (负载 2.2kg/m)

Actual mounting height: H_f = H + 67mm (load 2.2kg/m)

示意图 Drawing

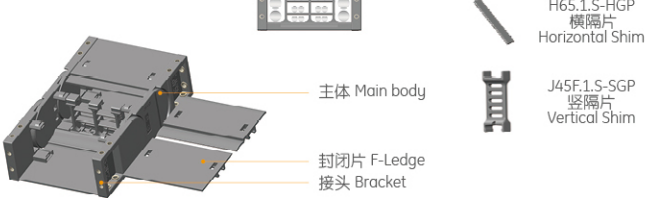

拖链型号 Cable Chain No.	内高 Hi	内宽 Bi	外高 Ha	外宽 Ba	款式 Styles	弯曲半径 Bending radius R	固定接头类型及参数 Bracket type and parameters								
							可配接头类型 Applicable bracket type	孔径 Bore diameter Φ1	孔距 (mm) hole distance						接头代号 Bracket No.
									A	B	C	D	E	F	
J45F.1.75S	45	75	67	99	F.S	125,150, 175,200,225, 250,300	F-F	6	24	90	94	26	15	105	J45F.1.75S-FJT
J45F.1.100S	45	100	67	124	F.S		F-F	6	24	115	94	26	15	130	J45F.1.100S-FJT
J45F.1.125S	45	125	67	149	F.S		F-F	6	24	140	94	26	15	155	J45F.1.125S-FJT
J45F.1.150S	45	150	67	174	F.S		F-F	6	24	165	94	26	15	180	J45F.1.150S-FJT
J45F.1.175S	45	175	67	199	F.S		F-F	6	24	190	94	26	15	205	J45F.1.175S-FJT

单位 (unit): mm

注: S 表示两侧可打开 Note: S indicates that the both side open

固定接头类型及参数 Fix bracket type and parameters (见表格 See table)



F-F 型接头 F-F type bracket

订货示例 Order Example

示例 拖链内高 45mm、内宽 75mm、半径 125mm、长度 1 米 / 15 节 (Sample: inner height 45mm, inner width 75mm, radius 125mm, length 1 meter / 15 links)

拖链 Chain J45F.1.75S R125 1000mm / 15 Links

接头 Bracket J45F.1.75S -XJT 1 副 (Set)

配件 Accessories 每节装 1 个竖隔片 / 1 个横隔片 (1 vertical shim / 1 horizontal shim can be mounted in every link)

注: 可根据客户要求定制各种规格。 Note: Various sizes can be customized according to customer requirements.